

A **TATA** Product

**VOLTAS**

# PROFIT FROM COOLING

COMMERCIAL REFRIGERATION RANGE



INDIA'S  
**NO. 1**  
CR BRAND\*


**2025**

# About TATA GROUP

Founded in **1868**, The Tata Group is a global business group with products and services in over **150** countries, over **1mn** employees and operations in over **100** countries. The group revenue is **\$165bn** with over **60%** generated in geographies other than India. The group is the global leader in several sectors.

Voltas Limited is a premier air conditioning and engineering solutions provider and a project specialist. Founded in India in **1954**, Voltas Limited is a part of the Tata Group, and in addition to Air Conditioners, Air Coolers, Water Dispensers, Water Coolers and Commercial Refrigeration products. Voltas offers smart engineering solutions for a wide spectrum of industries in areas such as heating, ventilation and air conditioning, refrigeration, electro-mechanical projects, electrification, textile machinery, mining and construction equipment, water management & treatment, cold chain solutions, building management systems and indoor air quality. Voltas Limited is among the top **10** companies within the Tata Group and is the undisputed market leader in room Air Conditioners in India.

Since the launch, Voltas Commercial Refrigeration has been the undisputed leader in the cooling space. It offers a wide range of Commercial Refrigeration, Water Cooler and Water Dispenser products loaded with latest technology. The product range is thoughtfully made, keeping you and your business in mind and comes with features that boast of unmatched performance while being eco-friendly.

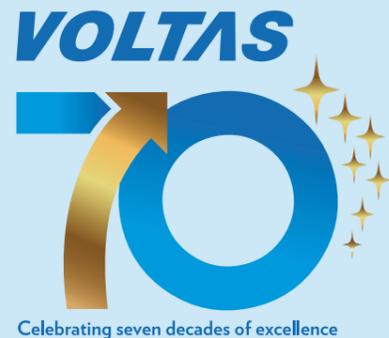

AIR COOLERS | AIR CONDITIONERS | AIR PURIFIERS | COMMERCIAL REFRIGERATION  
 COLD ROOM | DISHWASHER | MEDICAL REFRIGERATION | MICROWAVE OVEN | REFRIGERATOR |  
 WATER COOLERS | WATER HEATERS | WATER DISPENSERS | WASHING MACHINE

## SMART FEATURES

- Stucco Aluminium/ Metal Inner Liner for Improved Hygiene
- UV Grade Plastic for Long-lasting Appearance
- Spring Loaded Hinges for Effortless Usage
- Low-e (Emission) Glass
- Sunken Handles for Safer Operations
- Rugged and Heavy-Duty Shelves
- Castor Wheels for Easy Mobility
- Dual Temperature Freezing/ Cooling
- Soft Aesthetic Design
- Eco-friendly Refrigerant
- Single Mould Construction
- Tropicalized Machines
- Safety Lock
- Safety Compliant
- Star Rating
- LED Light
- Special Baskets
- Energy-efficient Compressor
- Anti-Corrosive Pre-Coated Body
- Compact Design
- 304 Food Grade Stainless Steel
- Self Closing Door
- Longer Cooling Retention

# HARD TOP CHEST FREEZERS

Hard Top Chest Freezers are ideal for storing ice creams and frozen foods. Built for high temperatures with excellent insulation, they stay cool even during power cuts. Their durable, corrosion-resistant body and eco-friendly, energy-efficient design ensure long-lasting performance

- Soft Aesthetic Design
- Rollers For Easy Mobility
- Star Rating
- Aluminium Inner Liner
- Compact Design
- Safety Compliant
- Eco-friendly Refrigerant
- Anti-corrosive Pre-coated Body
- Door Lock For Restricted Accessibility
- UV Grade Plastic For Long-lasting Appearance
- Sunken Handle For Safer Operation
- Tropicalized Machines
- Spring Loaded Hinges For Effortless Usage

## TECHNICAL SPECIFICATIONS

| Description               | CF320DA4-P           | CF360DA5-W   | CF460DA5-W   | CF500DA4-P   | CF540DA5-W   | CF600TA4-P   |
|---------------------------|----------------------|--------------|--------------|--------------|--------------|--------------|
| Product Dimension(WxDxH)  | 1184x665x830         | 1224x692x910 | 1494x692x910 | 1684x665x830 | 1724x692x910 | 1912x665x860 |
| Temperature Range         | <-18°C               | <-18°C       | <-18°C       | <-18°C       | <-18°C       | <-18°C       |
| Storage Volume (In Litre) | 295                  | 345          | 449          | 421          | 531          | 508          |
| BEE Star Rating           | 4 star               | 5 star       | 5 star       | 4 Star       | 5 Star       | 4 Star       |
| Refrigerant               | R290                 | R290         | R290         | R290         | R290         | R290         |
| No. Of Doors              | 2                    | 2            | 2            | 2            | 2            | 3            |
| No. Of Baskets            | 1                    | 1            | 2            | 2            | 2            | 3            |
| Door Lock                 | Available            | Available    | Available    | Available    | Available    | Available    |
| Wheel                     | Uni Direction Roller | Castor-4Nos  | Castor-4Nos  | Castor-4Nos  | Castor-4Nos  | Castor-4Nos  |





# HARDTOP CONVERTIBLE

These Convertibles, with durable Grey Embossed Metal Sheets, feature energy-efficient Dual Temperature Technology and eco-friendly refrigerants—ideal for keeping beverages, dairy, and frozen foods at perfect temperatures.



Soft Aesthetic Design



Rollers For Easy Mobility



Star Rating



UV Grade Plastic For Long-lasting Appearance



Door Lock For Restricted Accessibility



Anti-corrosive Pre-coated Body



Eco-friendly Refrigerant



Dual Temperature Freezing/Cooling



Safety Compliant



Compact Design



Sunken Handle For Safer Operation



Spring Loaded Hinges For Effortless Usage



Tropicalized Machines



## TECHNICAL SPECIFICATIONS

| Description               | CVF120SA3-P                             | CVF205SA2-P                             | CVF320DA4-P                             | CVF360DA5-W                             | CVF405DA4-P                             | CVF460DA5-W                             | CVF500DA4-P                             | CVF540DA5-W                             |
|---------------------------|---|---|---|---|---|---|---|---|
| Product Dimension(WxDxH)  | 588 x 665 x 795                         | 838 x 665 x 830                         | 1184 x 665 x 830                        | 1224 x 692 x 910                        | 1454 x 665 x 830                        | 1494 x 692 x 910                        | 1684 x 665 x 830                        | 1724 x 692 x 910                        |
| Temperature Range         | <-18°C (Freezer),<br>0° to 7°C (Cooler) |
| Storage Volume (In Litre) | 114                                     | 177                                     | 295                                     | 345                                     | 354                                     | 449                                     | 421                                     | 531                                     |
| BEE Star Rating           | 3 Star                                  | 2 Star                                  | 4 Star                                  | 5 Star                                  | 4 Star                                  | 5 Star                                  | 4 Star                                  | 5 Star                                  |
| Refrigerant               | R-600a                                  | R290                                    |
| No. Of Doors              | 1                                       | 1                                       | 2                                       | 2                                       | 2                                       | 2                                       | 2                                       | 2                                       |
| No. Of Baskets            | 1                                       | 1                                       | 1                                       | 1                                       | 2                                       | 2                                       | 2                                       | 2                                       |
| Door Lock                 | Available                               |
| Wheel Type                | Roller Uni<br>Direction                 | Roller Uni<br>Direction                 | Roller Uni<br>Direction                 | Castor-4Nos                             | Castor-4Nos                             | Castor-4Nos                             | Castor-4Nos                             | Castor-4Nos                             |




# FLAT GLASS TOP FREEZERS

Frozen foods and ice-creams find a robust and reliable home in the New 5 Star Flat Glass Top Freezers to showcase the products more prominently. Built sturdy for heavy use. Freezers are tropicalised for better cooling at higher temperatures. Low emissivity glass for better visibility and insulation. Also available with optional special baskets and LED lights.



## TECHNICAL SPECIFICATIONS

| Description                    | GT220GA5-W      | GT340GA5-W       | GT440GA5-W       | GT520GA5-W       |
|--------------------------------|-----------------|------------------|------------------|------------------|
| Product Dimension(WxDxH)       | 838 x 624 x 855 | 1184 x 624 x 855 | 1454 x 624 x 855 | 1684 x 624 x 855 |
| Temperature Range              | <-18°C          | <-18°C           | <-18°C           | <-18°C           |
| Storage Volume (In Litre)      | 176             | 275              | 326              | 388              |
| BEE Star Rating                | 5 Star          | 5 Star           | 5 Star           | 5 Star           |
| Refrigerant                    | R290            | R290             | R290             | R290             |
| No. Of Glass Doors ( Sliding ) | 2               | 2                | 2                | 2                |
| No. Of Baskets                 | 1               | 2                | 2                | 2                |
| Door Lock                      | Available       | Available        | Available        | Available        |
| Wheel                          | Castor Wheel    | Castor Wheel     | Castor Wheel     | Castor Wheel     |

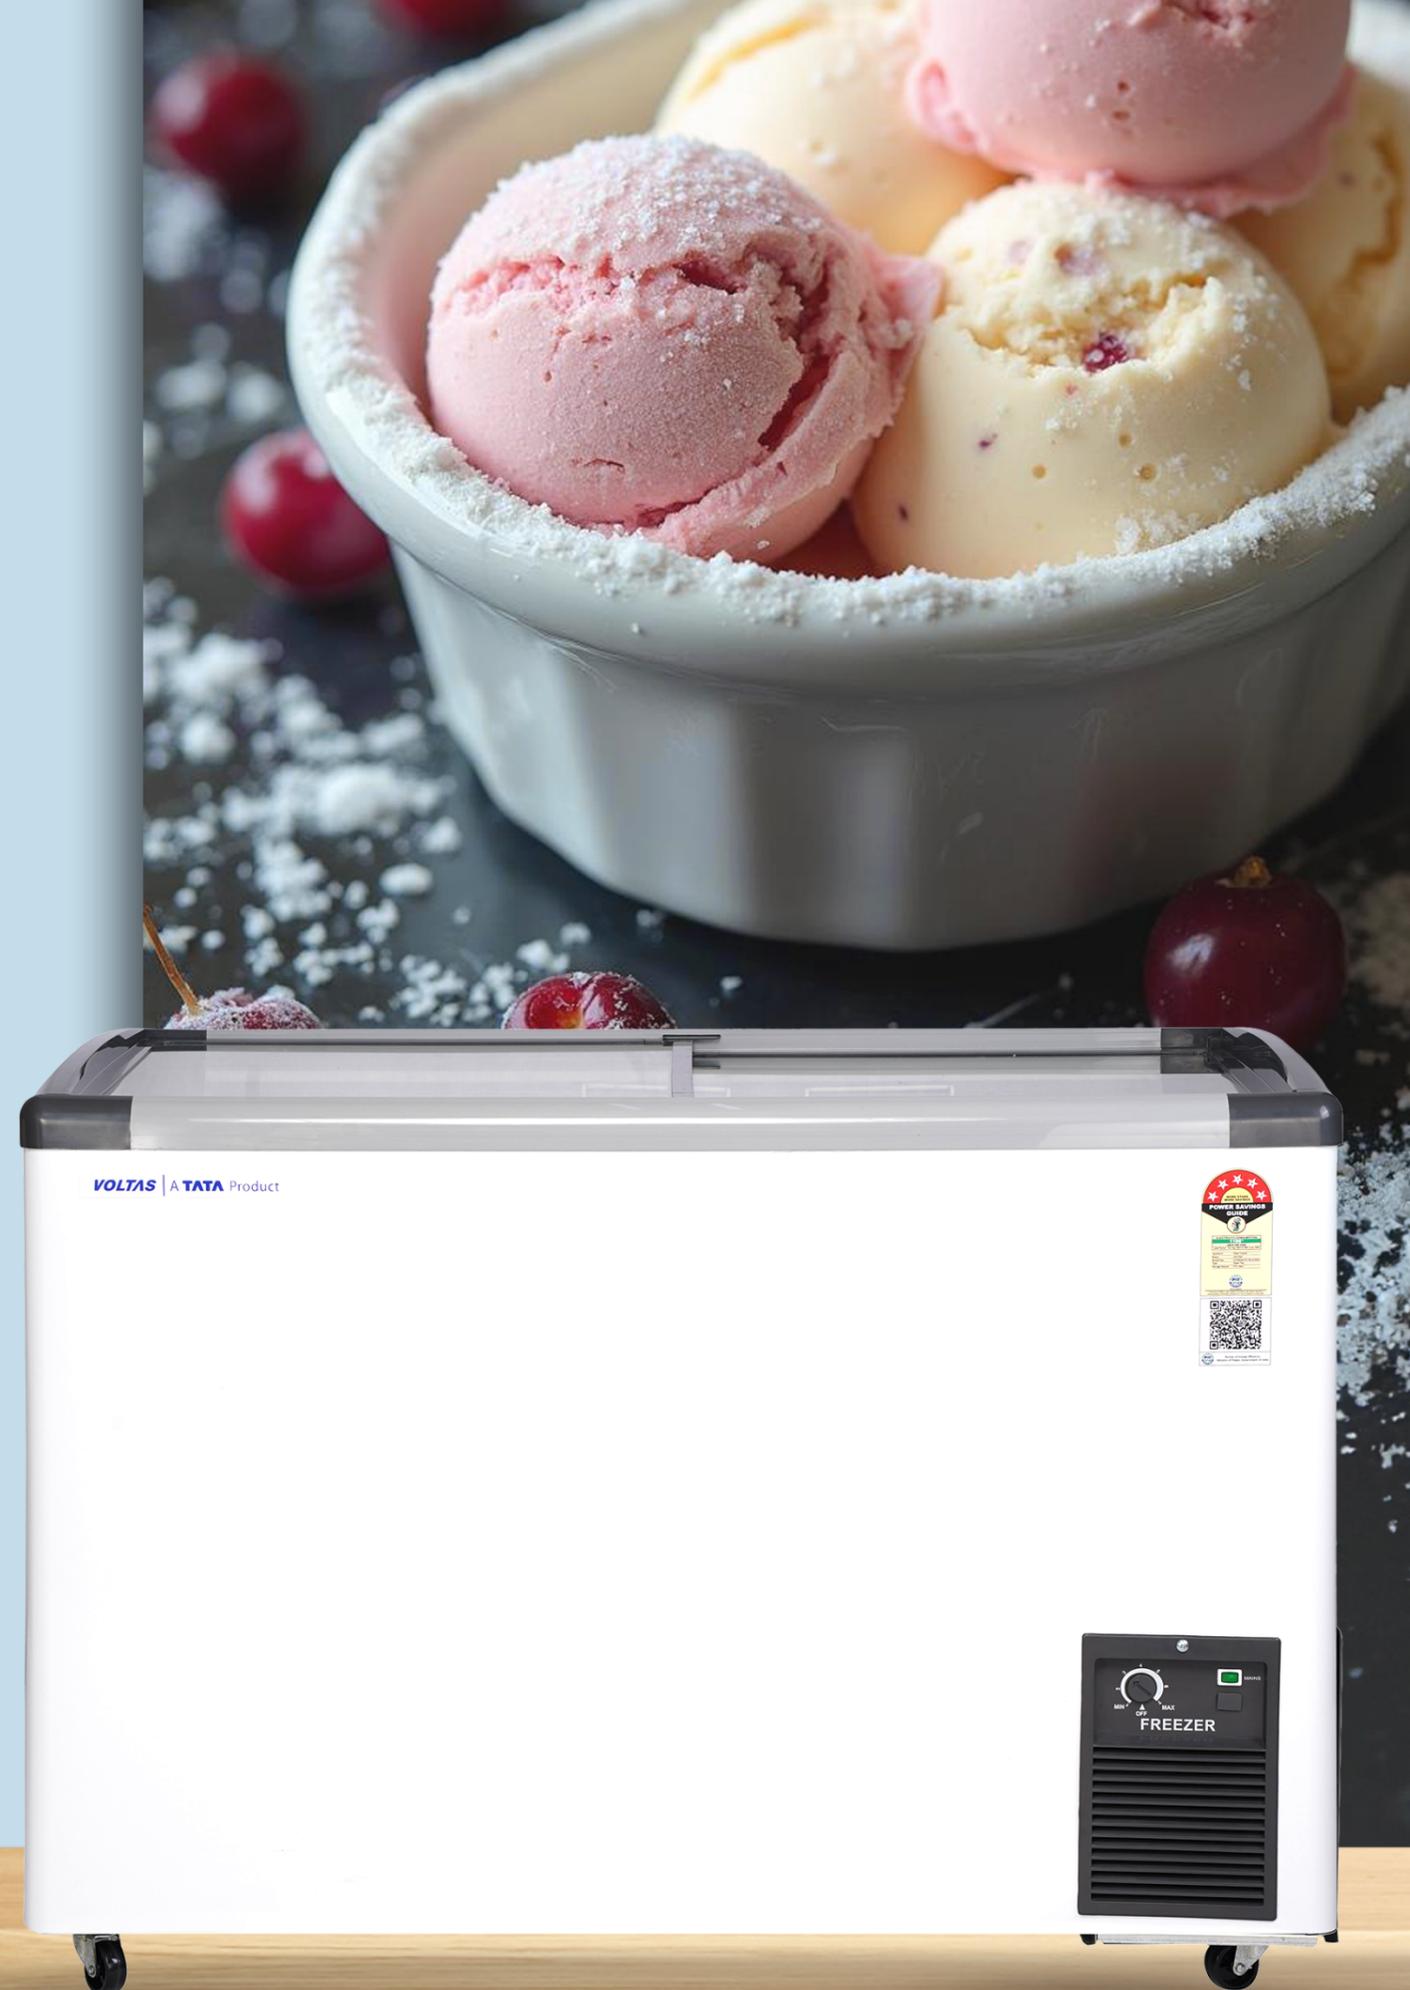

# COMBO COOLERS

Enjoy the dual functionality of a cooler and a freezer. The cooler compartment can be used for storing cold beverages and at the same time the freezer, for storing ice-cream and frozen foods. The coolers come with robust construction for heavy duty use. Tropical compressor in Combo Coolers ensure high performance freezing even in higher ambient temperatures of the Indian summer.

- Soft Aesthetic Design
- Wheels For Easy Mobility
- Energy-efficient Compressor
- Safety Compliant
- Compact Design
- UV Grade Plastic For Long-lasting Appearance
- Door Lock For Restricted Accessibility
- Anti-corrosive Pre-coated Body
- Spring Loaded Hinges For Effortless Usage
- Upto 40% Electricity Saving
- Dual Temperature Freezing/Cooling
- Tropicalized Machines
- Aluminium Inner Liner
- Eco-friendly Refrigerant

## TECHNICAL SPECIFICATIONS

| Description               | CB HT 300 DD V                       | CB HT 400 DD V                       |
|---------------------------|--------------------------------------|--------------------------------------|
| Product Dimension (WxDxH) | 1329 x 575 x 832                     | 1275 x 740 x 825                     |
| Temperature Range         | <-18°C (Freezer), 0° to 7°C (Cooler) | <-18°C (Freezer), 0° to 7°C (Cooler) |
| Gross Volume (In Litre)   | 300                                  | 400                                  |
| Refrigerant               | R600                                 | R290                                 |
| No. Of Shelves            | 1                                    | 1                                    |
| No. Of Doors              | 2                                    | 2                                    |
| Arrangement for Door Lock | Available                            | Available                            |



# VISI COOLERS



Form meets function in this stylish glass door merchandiser. The Visi Coolers are especially designed to cool products uniformly as well as showcase the products inside, ideal for storing beverages and dairy products for a longer time at desired temperatures. The coolers are tropicalized for cooling in high temperatures and designed for faster pull down time. These compact storage solutions are a perfect match for commercial cooling purposes.

-  Soft Aesthetic Design
-  Wheels For Easy Mobility
-  Energy-efficient Compressor
-  LED Light
-  Rugged And Heavy-duty Shelves
-  UV Grade Plastic For Long-lasting Appearance
-  Door Lock For Restricted Accessibility
-  Anti-corrosive Pre-coated Body
-  Longer Cooling Retention
-  Compact Design
-  Safety Compliant
-  Tropicalized Machines
-  Low - E Glass To Avoid Cooling Loss
-  Eco-friendly Refrigerant

## TECHNICAL SPECIFICATIONS

| Description               | VC GT 50 SD FGLS | VC GT 220 SD FGLS | VC GT 320 SD FGLS | VC GT 450 SD    | VC GT 550 DD     | VC GT 1000 DD     |
|---------------------------|------------------|-------------------|-------------------|-----------------|------------------|-------------------|
| Product Dimension(WxDxH)  | 450 x 470 x 500  | 535 x 670 x 1400  | 560 x 705 x 1700  | 650 x 730x 1900 | 770 x 740 x 1970 | 1100 x 752 x 1991 |
| Temperature Range         | 4°C to 10°C      | 2°C to 10°C       | 2°C to 10°C       | 2°C to 10°C     | 2°C to 10°C      | 2°C to 10°C       |
| Gross Volume (In Litre)   | 48               | 215               | 303               | 426             | 526              | 998               |
| Refrigerant               | R-600a           | R-134a            | R-134a            | R-134a          | R-134a           | R-290             |
| Illumination Inside       | No               | LED               | LED               | LED             | LED              | LED               |
| No. Of Shelves            | 1                | 3                 | 4                 | 5               | 5                | 5                 |
| No. Of Doors              | 1                | 1                 | 1                 | 1               | 2                | 2                 |
| Arrangement for Door Lock | No               | Yes               | Yes               | Yes             | Yes              | Yes               |
| Wheel                     | NA               | Yes               | Yes               | Yes             | Yes              | Yes               |



# WATER COOLERS

Quench your thirst for chilled water with Voltas Water Coolers & Enjoy cool, clean water anytime.

- Soft Aesthetic Design
- In-situ Puf Insulation
- Energy-efficient Compressor
- Upto 40% Electricity Saving
- Food Grade Stainless Steel
- Eco-friendly Refrigerant
- Tropicalized Machines
- Anti-corrosive Pre-coated Body
- Longer Cooling Retention
- Compact Design
- Safety Compliant

## TECHNICAL SPECIFICATIONS

| Description                            | 15/15 PSS/FSS                    | 15/40 PSS/FSS                    | 30/40 PSS/FSS                    | 40/80 PSS/FSS                    | 60/80 PSS/FSS                    | 60/120 PSS/FSS                   | 150/150 PSS/FSS*                 | 150/300 PSS/FSS*                 |
|--|----------------------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|
| Storage Capacity (Ltrs)                | 15                               | 40                               | 40                               | 80                               | 80                               | 120                              | 150                              | 150                              |
| Cooling Capacity(Ltrs/hr)              | 15                               | 15                               | 30                               | 40                               | 60                               | 60                               | 150                              | 300                              |
| Refrigerant                            | R-134a                           | R-134a                           | R-134a                           | R-134a                           | R-134a                           | R-134a                           | R-32                             | R-32                             |
| Thermostat Type (Range)                | Electromechanical ( 8 To 27° C ) |
| Number Of Faucet                       | 1                                | 1                                | 1                                | 2                                | 2                                | 2                                | 2                                | 3                                |
| Storage Tank - Food Grade              | Yes                              |
| Foot                                   | Plastic                          |
| Product Dimensions With Trough (WxDxH) | 368 x 548 x 1033                 | 461 x 621 x 1087                 | 461 x 621 x 1087                 | 461 x 621 x 1311                 | 461 x 621 x 1311                 | 566 x 746 x 1266                 | 566 x 746 x 1391                 | 970 x 780 x 1391                 |

(\*Upcoming Configurations)

## NCW

| Description                            | 15/40 PSS & FSS-NCW              | 40/80 PSS & FSS-NCW              |
|--|----------------------------------|----------------------------------|
| Storage Capacity (L)                   | 40                               | 80                               |
| Cooling Capacity (L/hr)                | 15                               | 40                               |
| Refrigerant                            | R-134a                           | R-134a                           |
| Thermostat Type (Range)                | Electromechanical ( 8 To 27° C ) | Electromechanical ( 8 To 27° C ) |
| Number Of Faucet                       | 2=1+1 (1 NORMAL+1 COLD)          | 2=1+1 (1 NORMAL+1 COLD)          |
| Storage Tank - Food Grade              | Yes                              | Yes                              |
| Foot                                   | Plastic                          | Plastic                          |
| Product Dimensions With Trough (WxDxH) | 461 x 621 x 1087                 | 461 x 621 x 1311                 |



# WATER DISPENSERS

Stay Hydrated with the new range of Water Dispensers. Available in Table top, Floor standing storage cabinet, Refrigeration cabinet - smart choice for every office and home.



Safety Lock



Compact Design



Energy-efficient Compressor



Eco-friendly Refrigerant



Tropicalized Machines



LED Indicators



UV Grade Plastic For Long-lasting Appearance

## TECHNICAL SPECIFICATIONS

### SPRING SERIES

| Models                               | Minimagic Spring T T + | Minimagic Spring RV + | Minimagic Spring FV + | Minimagic Spring FS + | Minimagic Spring R RB+ | Minimagic Spring R RV + |
|--------------------------------------|------------------------|-----------------------|-----------------------|-----------------------|------------------------|-------------------------|
| Unit Dimension (W X D X H) in mm     | 310 x 355 x 490        | 310 x 330 x 970        | 310 x 330 x 970         |
| Refrigerant                          | R-134                  | R-134                 | R-134                 | R-134                 | R-134                  | R-134                   |
| Type                                 | Table Top              | Floor Mounted         | Floor Mounted         | Floor Mounted         | Floor Mounted          | Floor Mounted           |
| Cabinet                              | No                     | Cooling Cabinet       | Storage Cabinet Only  | No                    | Cooling Cabinet        | Cooling Cabinet         |
| Cabinet Capacity (Ltrs)              | NA                     | 18 Litre              | 18 Litre              | NA                    | 18 Litre               | 18 Litre                |
| Cooling Cabinet Temperature          | NA                     | <16°C                 | NA                    | NA                    | <16°C                  | <16°C                   |
| No. of Faucets                       | 3                      | 3                     | 3                     | 3                     | 3                      | 3                       |
| Cold Water Storage Capacity in Litre | 3                      | 3                     | 3                     | 3                     | 3                      | 3                       |
| Hot Water Storage Capacity in Litre  | 0.9                    | 0.9                   | 0.9                   | 0.9                   | 0.9                    | 0.9                     |
| Display                              | LED Indicators         | LED Indicators        | LED Indicators        | LED Indicators        | LED Indicators         | LED Indicators          |
| Tap Function                         | Hot, Normal & Cold     | Hot, Normal & Cold    | Hot, Normal & Cold    | Hot, Normal & Cold    | Hot, Normal & Cold     | Hot, Normal & Cold      |
| Hot Water Dispensing Lock            | Yes                    | Yes                   | Yes                   | Yes                   | Yes                    | Yes                     |

### PURE SERIES

| Models                               | Minimagic Pure T   | Minimagic Pure R   | Minimagic Pure F     | Minimagic Pure FS  | Minimagic Pearl RB | Minimagic Pearl RR |
|--------------------------------------|--------------------|--------------------|----------------------|--------------------|--------------------|--------------------|
| Unit Dimension (W X D X H) in mm     | 347 x 375 x 540    | 347 x 375 x 990    | 347 x 375 x 990      | 347 x 375 x 990    | 347 x 375 x 990    | 347 x 375 x 990    |
| Refrigerant                          | R-134              | R-134              | R-134                | R-134              | R-134              | R-134              |
| Type                                 | Table Top          | Floor Mounted      | Floor Mounted        | Floor Mounted      | Floor Mounted      | Floor Mounted      |
| Cabinet                              | No                 | Cooling Cabinet    | Storage Cabinet Only | No                 | Cooling Cabinet    | Cooling Cabinet    |
| Cabinet Capacity                     | NA                 | 20 Litre           | 20 Litre             | NA                 | 20 Litre           | 20 Litre           |
| Cooling Cabinet Temperature          | NA                 | <16°C              | NA                   | NA                 | <16°C              | <16°C              |
| No. of Faucets                       | 3                  | 3                  | 3                    | 3                  | 3                  | 3                  |
| Cold Water Storage Capacity in Litre | 3                  | 3                  | 3                    | 3                  | 3                  | 3                  |
| Hot Water Storage Capacity in Litre  | 0.9                | 0.9                | 0.9                  | 0.9                | 0.9                | 0.9                |
| Display                              | LED Indicators     | LED Indicators     | LED Indicators       | LED Indicators     | LED Indicators     | LED Indicators     |
| Tap Function                         | Hot, Normal & Cold | Hot, Normal & Cold | Hot, Normal & Cold   | Hot, Normal & Cold | Hot, Normal & Cold | Hot, Normal & Cold |
| Hot Water Dispensing Lock            | Yes                | Yes                | Yes                  | Yes                | Yes                | Yes                |



A **TATA** Product

**VOLTAS**

*Serving Countless  
Indian business with pride*



**DEEP FREEZERS | WATER COOLERS | WATER DISPENSERS | VISI COOLERS | COLD ROOMS | MEDICAL REFRIGERATORS**

Voltas 24x7 Customer Service - 1860 599 4555, 9650694555.  
For product registration SMS <WTA> to 9289525321  
Buy only genuine Voltas stabilizers.

To locate your nearest store,  
log on to: [www.voltas.com/apps/store-locator](http://www.voltas.com/apps/store-locator)

Follow us at [f My Voltas](#) [t My Voltas](#) [i My Voltas](#) [V Voltas Limited](#) [y My Voltas](#)

Buy online at:  
[www.voltas.com](http://www.voltas.com)

**Corporate Head Office:** Voltas Limited, Voltas House A, Dr. Babasaheb Ambedkar Road, Chinchpokli, Mumbai - 400033, Phone: 022- 66656666. **Delhi:** Voltas Limited, A - 43, Mohan Co-Operative Industrial Estate, Mathura Road, New Delhi - 110044, Phone: 011-66505550. **Haryana:** Voltas Limited, A - 43, Mohan Co-Operative Industrial Estate, Mathura Road, New Delhi. Phone: 011-66505550. **Ghaziabad:** Voltas Limited, D-15, R.S. Plaza, 3rd Floor, Raj Nagar, Rdc, Ghaziabad - 201001, Ph. 0120-6404801. **Chandigarh:** Voltas Limited, Plot No. 194-195, First Floor, Industrial Area Phase-2, Chandigarh - 160002, Phone: 0172- 4111800. **Lucknow:** Voltas Limited, Shalimar Titanium, Block - C, 4th Floor, Office Nos. 410 - 412, Plot No. Tcg -1/1, Opp. Indira Gandhi Pratishthan, Vibhuti Khand, Gomti Nagar, Lucknow - 226 010, Phone: 0522-6566961. **Jaipur:** Voltas Limited, Diamond Tower, 201-203, Purani Chungi, Ajmer Road, Jaipur-302021, Phone: 0141-2972015. **Hyderabad:** Voltas Limited, 7-2-1735, Sanath Nagar, Opp. Neelema Hospital, Hyderabad-500018. Phone: 040-66746818. For Institutional Inquiry: 9603926217. **Vijayawada:** Voltas Limited, # 23-24-29, Beside Nadaras Function Hall, Bhagat Singh Road Corner, Vijayawada- 520011. For Institutional Inquiry - 9866511189. **Bangalore:** Voltas Limited, 7th Floor, Pride Hulkli, Lalbagh Road, Bangalore- 560027. For Corporate Enquiries, Ph: 8239439016. **Chennai:** Voltas Limited, No 624 , Anna Salai , Teynampet , Chennai 600018 Ph. 044 -66760437. **Kochi:** Voltas Limited, Shema Building, Door No.39/4166, M G Road, Ravipuram, Kochi, Kerala -882016, Ph:0484 6605555. **Coimbatore:** Voltas Limited, 1413, Trichy Road, Coimbatore-641018 ,Phone-0422-6619051/31. **Mumbai:** Voltas Limited, Voltas House B, 2nd Floor, T.B. Kadam Marg, Chinchpokli, Mumbai - 400033, Phone: 022-66656633. **Goa:** Voltas Limited, Ground Floor, Flat No. 1, La Campala Colony No.2, Miramar Parnji Goa - 403001. **Pune:** Voltas Limited, UPBG Division, 5/4 Chandra Nagar, Nagar Road, Pune - 411014, Phone: 020-96697408. **Thane:** Voltas Limited, Unit li, 1st Floor, 2nd Pokhran Road, Thane-400601, Phone: 022-67920106/07. **Nagpur:** Adisun Trade Center, 5<sup>th</sup> Floor, Plot No-38, Dhaga Layout, Near Crazy Castle, Nagpur- 440010, Phone: 9823036896. **Ahmedabad:** Voltas Limited, A-301, Shivalk Corporate Park, Shivranjini Crossroad Satellite, Ahmedabad- 380015, Phone: 0790-66301190/91. **Indore:** 501-B, 5th Floor, Nrk Business Park, Block B-1, Pu-4, Sch.No.54 Vijay Nagar Square, A.B.Road, Indore-452010, M.P., Phone: 0731-4043512 & 4046393. **Raipur:** Voltas Limited, Kunwar Ben Karsam Bhai Chamber, Shop No. 419/420, 4th Floor, New Timber Market, Mandi Market, Devendra Nagar, Raipur - 492001, Ph: 4033886. **Kolkata:** Voltas Limited, Unit No. 805, 8th Floor, Godrej Waterside Tower - 2, Plot No. - 5, Block Dp, Sector - V, Salt Lake, Kolkata - 700091, Phone: 033-66266200-205. For Institutional Inquiry - 9007014430. **Patna:** Voltas Limited, Maharaja Complex, 306-A, 3rd Floor, Frazier Road, Patna-800001, Phone : 7091091400 . For Institutional Inquiry -9007014430. **Jamshedpur:** Voltas Limited, Voltas House, 3rd Floor, Main Road, Bistupur, Jamshedpur - 831001, Phone: . 9040408545, 9830488691 For Institutional Inquiry -9007014430. **Bhubaneswar:** Voltas Limited, B-15, 2nd Floor, Arihant Plaza, Shaheed Nagar, Bhubaneswar-751007, Phone: 7077284059, 9937140010 For Institutional Inquiry 9007014430. **Guwahati:** Voltas Limited, Upasana Palace Building, 6th Floor, Dr. Rajendra Prasad Road, Near Ganesh Mandir, Ganeshguri, Guwahati - 781006. Phone : 9706982628 For Institutional Inquiry - 9007014430.

♻ In India, E-Waste (Management and Handling) Rules 2016 r/w E-Waste Management Amendment Rules 2018 has been notified by the Ministry of Environment, Forests and Climate Change Government of India. Voltas Limited (Voltas) stands committed to implement E-Waste Rules. Voltas has done tie-up with the government authorised E-Waste Recycler for facilitating our Channel partners/customers to dispose and/or discard Electrical and Electronic Products after its end-of-life (when a product/part is non-operational or non-repairable) and including spare parts. The authorised Recycler has expertise in assisting Voltas in fulfilling their compliances related to EPR and E-waste Management. Channel partners/customers need to get in touch with Voltas Call Centre (9650694555) to dispose and/or discard Electrical and Electronic Products after its end-of-life. Channel partners/Consumers should contribute to resource conservation and prevent potential environmental problems by a simple action — the proper depositing of their old consumer durable products, its accessories or defective spares with authorised Recyclers. E-waste should be disposed of separately from the general waste stream via designated collection facilities identified by Voltas.

\*Features are available in select models only. T & C apply. As a continuous policy of product innovations at Voltas, design and specifications are subject to change without prior notice.